


聚酯双向格莱圈 W3-11

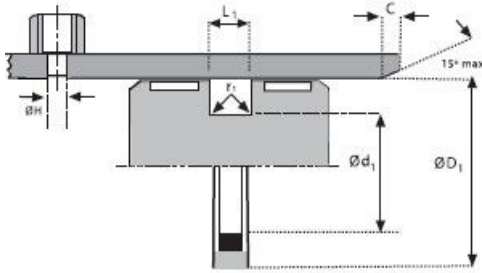

截面图	材料	温度范围	压力	速度	特点	标识
	TPE + 橡胶	NBR -30至100	≤50	≤2	安装简易, 抗磨损, 可以过孔, 取代多种 活塞密封	W3-11N

D1	d1	L1	英制↔公制	D1	d1	L1	D1	d1	L1
1	0.691	0.129		25 +0.052/-0	17.5 +0/-0.043	3.2	180+0.100/-0	159.0 +0/-0.100	8.1
1.25	0.941	0.129		30 +0.052/-0	22.5 +0/-0.052	3.2	210+0.115/-0	189.0 +0/-0.115	8.1
1.5	1.191	0.129		40 +0.062/-0	29.0 +0/-0.052	4.2			
1.75	1.441	0.129		40 +0.062/-0	27.0 +0/-0.052	6.3			
2	1.691	0.129		45 +0.062/-0	34.0 +0/-0.062	4.2			
2.25	1.941	0.129		50 +0.062/-0	39.0 +0/-0.062	4.2			
2.5	2.191	0.129		55 +0.074/-0	39.5 +0/-0.062	6.3			
2.75	2.441	0.129		60 +0.074/-0	49.0 +0/-0.062	4.2			
3	2.462	0.284		63 +0.074/-0	52.0 +0/-0.074	4.2			
3.25	2.712	0.284		63 +0.074/-0	50.0 +0/-0.062	6.3			
3.5	2.962	0.284		70 +0.074/-0	59.0 +0/-0.074	4.2			
3.75	3.212	0.284		70 +0.074/-0	54.0 +0/-0.074	6.3			
4	3.462	0.284		70 +0.074/-0	57.0 +0/-0.074	6.3			
4.25	3.712	0.284		75 +0.074/-0	64.0 +0/-0.074	4.2			
4.5	3.962	0.284		80 +0.074/-0	64.5 +0/-0.074	6.3			
4.75	4.212	0.284		85 +0.074/-0	69.5 +0/-0.074	6.3			
5	4.462	0.284		90 +0.074/-0	74.5 +0/-0.074	6.3			
5.25	4.504	0.379		90 +0.087/-0	74.5 +0/-0.074	6.3			
5.5	4.754	0.379		90 +0.087/-0	75.0 +0/-0.074	7.5			
6	5.254	0.379		95 +0.087/-0	79.5 +0/-0.074	6.3			
6.25	5.504	0.379		100+0.100/-0	84.5 +0/-0.087	6.3			
6.5	5.754	0.379		120+0.087/-0	99.0 +0/-0.087	10.5			
7	6.250	0.379		125+0.100/-0	109.5 +0/-0.087	6.3			
7.25	6.504	0.379		125+0.100/-0	104.0 +0/-0.087	8.1			
8	7.254	0.379		130+0.100/-0	114.5 +0/-0.087	6.3			
8.5	7.754	0.379		140+0.100/-0	119.0 +0/-0.087	8.1			
9	8.137	0.379		140+0.100/-0	119.0 +0/-0.087	10.5			
10	9.137	0.379		150+0.100/-0	129.0 +0/-0.100	8.1			
				150+0.100/-0	129.0 +0/-0.100	10.5			
				160+0.100/-0	139.0 +0/-0.100	8.1			
				170+0.100/-0	149.0 +0/-0.100	8.1			